Baasha

https://baashabeauty.com/

Follow Us

- **Scan to follow us and get a free gift.**
- **Post about our product to win cashback**

$50

Feel free to contact us at:
service@baashabeauty.com

Monday-Saturday
(9:00 a.m ~ 6:00 p.m.PST)

Dear Valued Customer,

Thank you for choosing Baasha as your shopping companion! In our constant pursuit of providing top-notch products and services, we cordially invite you to share your invaluable feedback after making a purchase and have the chance to receive a **$50 cash-back** reward!

Here's how:

1. Upon completing your shopping experience, head over to our product page.
2. Share your thoughts and feelings in the comments section.
3. Capture your shopping moment: Share photos or videos of our salon chair on Instagram, Facebook, or TikTok, and don't forget to tag our social media account @baashasalonfurniture in your posts.
4. Kindly send a screenshot of your comment along with your order number to our email address: service@baashabeauty.com.

As a token of appreciation, outstanding photos or videos may have the chance to receive a $50 cash-back reward!

Should you encounter any issues or concerns during your usage, please feel free to reach out to us before leaving a review. We are dedicated to resolving any matters for you.


We eagerly anticipate hearing your voice as your feedback means the world to us.

Warm Regards,
Baasha Team


Baasha

Baasha



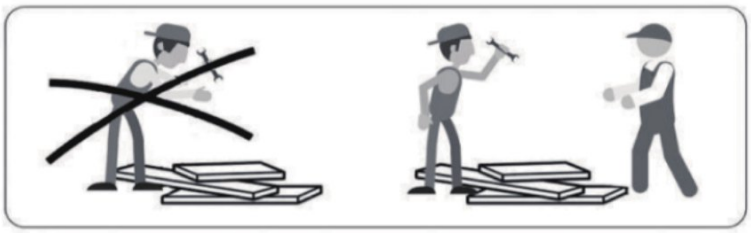

Assemble with the
assistance of another person.

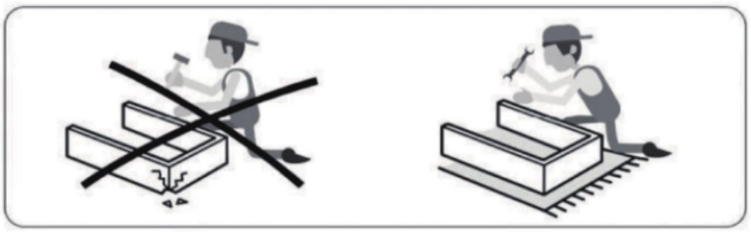

Carefully protect the product
during installation.

Installation Instructions

1. Parts Included



A: Base




B: Pump



C: Step Pedal



D: Screws



E：Chassis



F: Footrest Connector



G：Footrest



H：Leg support



I: Backrest



J: Seat



K：#14 & #17 Wrench



L: #14Sleeve & Allen Wrench



M：Self-tapping screws



N: Black Connector



O:Pin

Please note: The F Footrest connector *2 & N Black Footrest connector *1 are bundled on the bottom of the cushion, remove the cushion from the seat, and you will see them.

2. Installation Instruction

Please note: the top seat could be heavy, 2 people are recommended for the installation

Step 1. Attach the Step Pedal to the Pump



Insert the pin into the hole on the pump and hammer it in to secure it to the pump.





1-1 Pump



1-2 Base



1-3 Wrench & Screws



1-4 Step Pedal

1. Parts you will need for this step.

Turn the pump upside down, insert the base.



2-1

Pass the wrench through the socket and use it to tighten the 4 nuts to the base.




2-2

Turn the pump to the upright position.




2-3

Secure the pump cover to the pump using the screw SC*C.

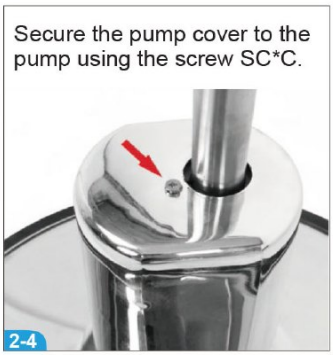

2-4

Remove the two screws from both sides of the pump using the wrench(one screws from each side), put them aside for the next step.




3-1

Align the step pedal with the pump as shown in the picture, please ensure it is correctly positioned.



3-2

Secure the step pedal and the pump using the screws(that you removed from step 3-1) and the wrench.



3-3

Double check the step pedal is correctly installed as shown in the picture（step pedal is often installed upside down causing problem with height adjustment）




3-4

Step 2. Install the Chassis



2

Place the Chassis onto the hydraulic pump (please note the pinon the pump toward the gap of the pump joint, as shown in 2-1).

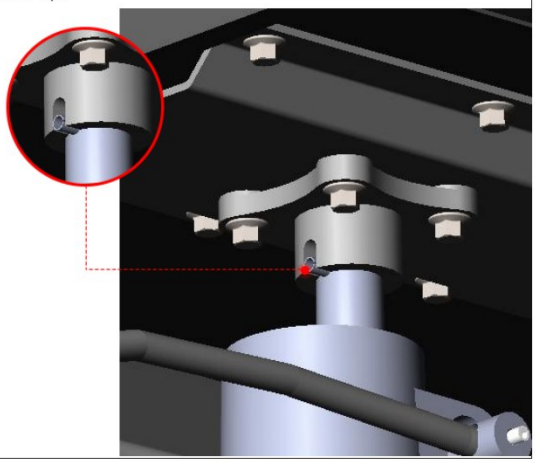

2-1

Step 3. Install the Footrest Connector and Footrest

Parts you will need for this step.




Footrest Connector



Footrest



Allen Wrench

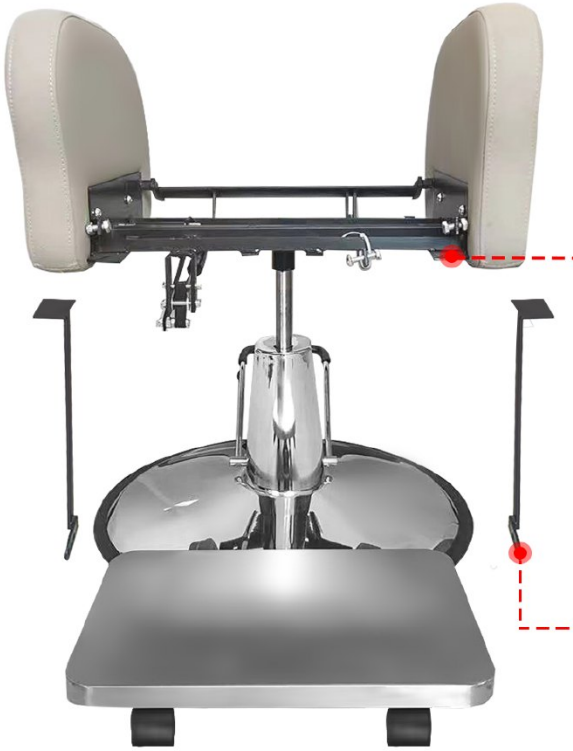



3-1

Install the Footrest Connector to the Seat Frame:
Remove the screws pre-installed on both sides of the frame (as shown in 3-1). Place the footrest connector underneath the seat frame (not on top), align the screw holes, and then re-tighten the screws using the provided Allen wrench.



3-2

Install the Footrest to the Connector: Remove the screws on both sides of the footrest(as shown in 3-2), align the screw holes of the footrest and the connector, and then re-tighten the screws with allen wrench provided.

3

Step 4. Install the Leg Support to the Chassis

Parts you will need for this step.



Leg Support



#14Sleeve




#17 Wrench



4



4-1 Remove the screws and nuts pre-installed on both sides of the chassis (as shown in 4-1).

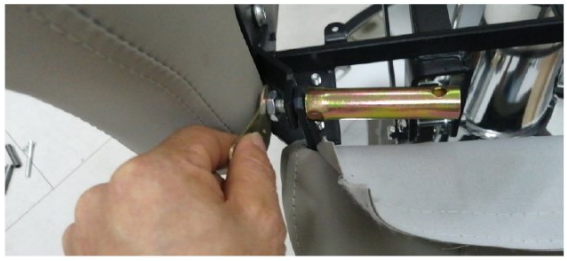

4-2 Align the screw holes on both sides of the leg support and the chassis, and then re-tighten the screws with the #17 wrench and #14sleeve provided (as shown in 4-2).

Step 5. Connect the Leg Support and Chassis

Parts you will need for this step.




Footrest Connector



#14Sleeve



Allen Wrench

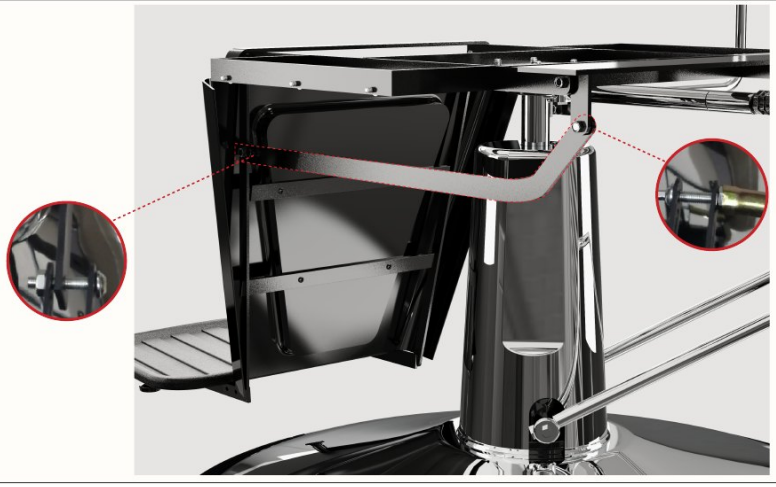

5-1

Remove the screws and nuts pre-installed on the chassis and leg support, put in the footrest Connector and tighten the screws again.

Step 6. Install the Backrest

Parts you will need for this step.



#14Sleeve



Black Connector



Allen Wrench




6-1



Remove the 4 nuts under the backrest, and then align the 4 screw holes on the chassis to place the backrest on the chassis (as shown in 6-2).

6-2

Pass the longer end of the wrench through the hole of the sleeve, and then use this tool to tighten the 4 nuts removed from the previous step to fix the backrest (as shown in 6-3).

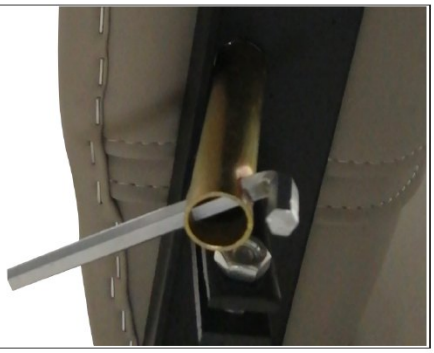

6-3

Step7. Install the seat cushion

Parts you will need for this step.



Allen Wrench



Seat




Self-tapping Screws



Place the seat cushion onto the seat frame.

7-1

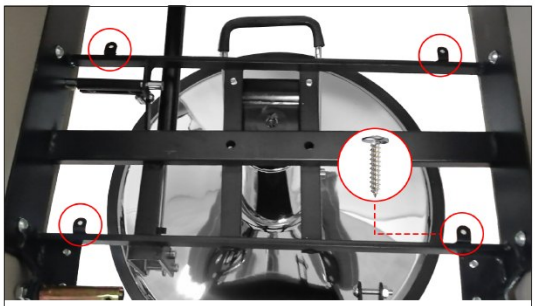

No pre-drilled holes are needed on the cushion. Insert the self-tapping screws into the four screw holes on the seat frame and tighten them. The screws will go through the cushion and secure it in place.

7-2



Installation Completed.


7-3

Chair Operation Guide

1 Reclining or Returning the Backrest to an Upright Position

·Sit on the chair, pull the reclining handle forward while leaning your body backward. The chair' s backrest will recline.

·Pull the reclining handle forward while sitting upright, and the backrest will return to the upright position.

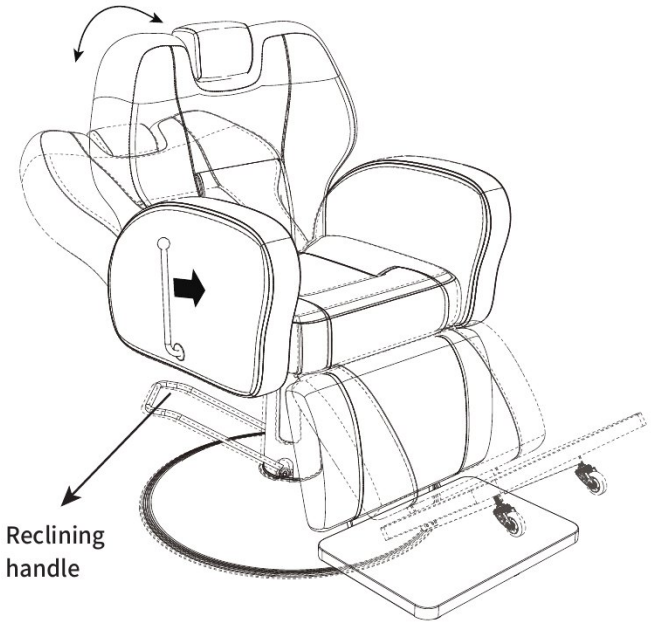


2 Locking or Unlocking the Chair's Swivel Function

This chair has a locking feature.

2-1. Locking the Chair


Lift the step pedal upwards, and the internal oil pump will lock, preventing the chair from rotating.

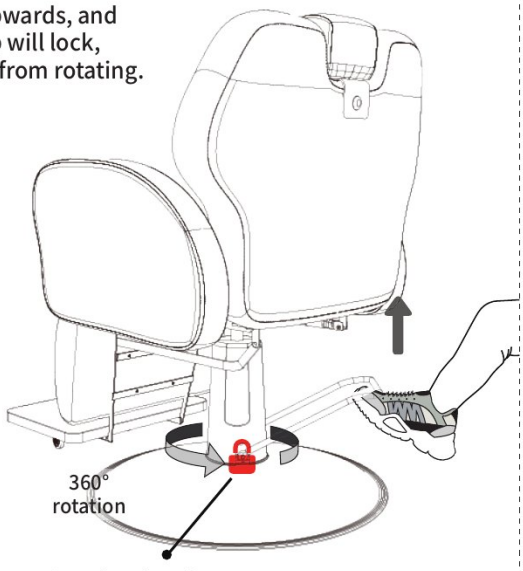

rotating locked

2-2. Unlocking the Chair

Press down the step pedal while rotating the chair; at this point, the chair can swivel.

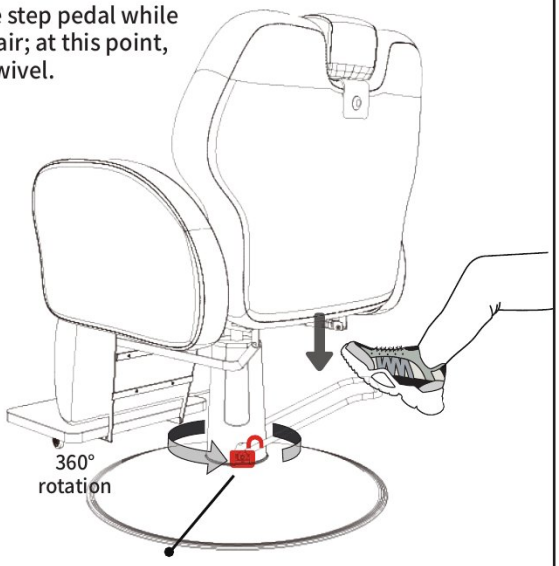


rotating unlocked

3 Adjusting the Chair Height

3-1. Raising the Chair


Continuously press the step pedal halfway down, and the chair will rise.

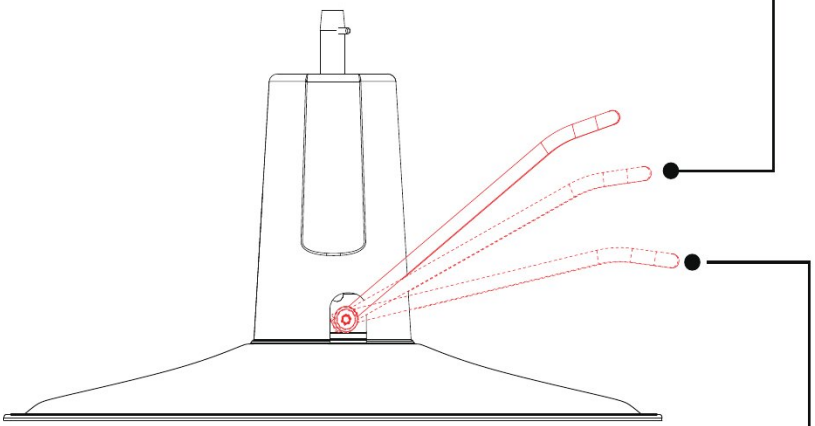

3-2. Lowering the Chair


Press the step pedal all the way down and hold it, and the chair will lower.

Correct Way to Leave the Chair to Avoid Tipping

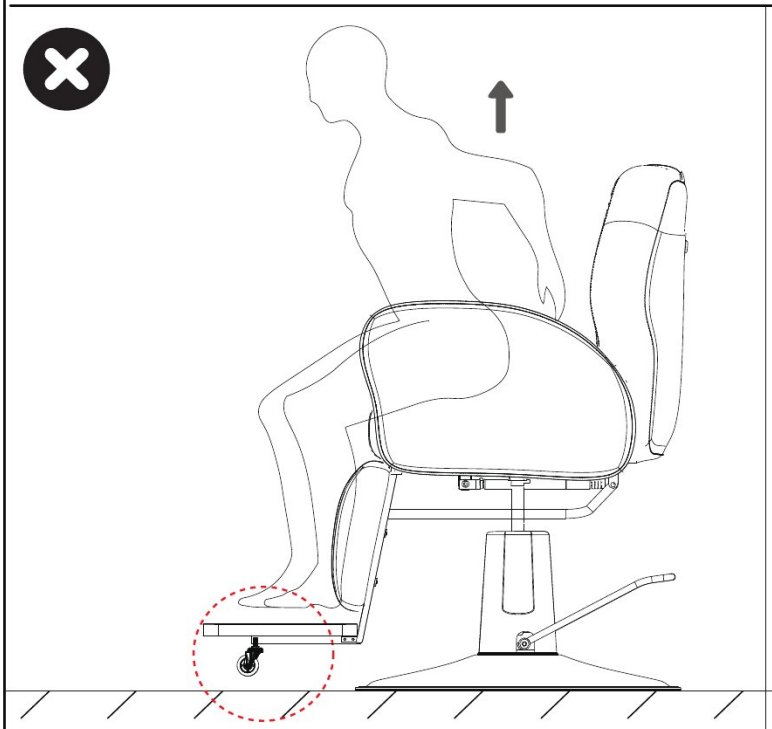

Incorrect Example:

There is a significant distance between the support rod and the ground, stepping on the foot pedal at this time may cause the chair to tip forward.

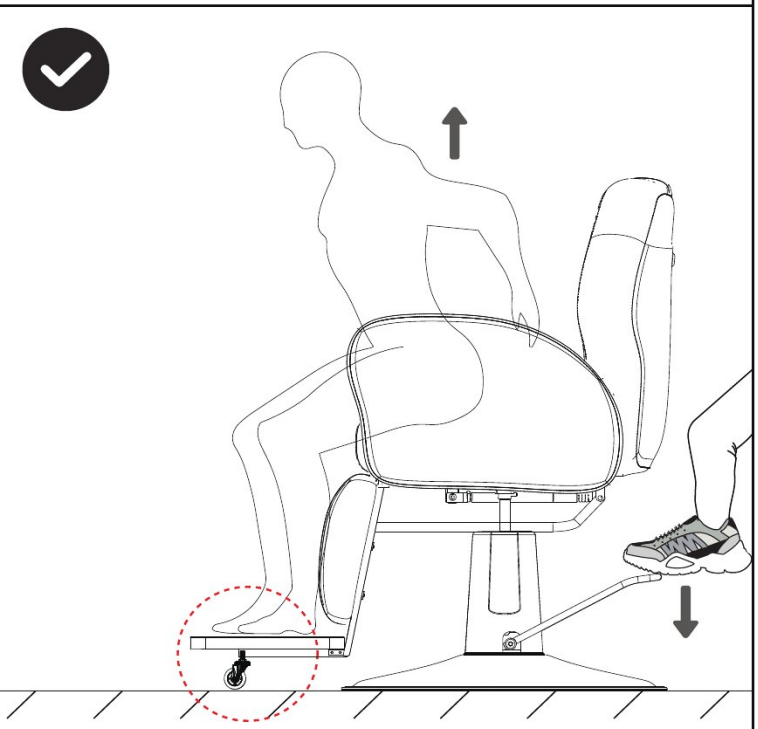

Correct Example:

Lower the chair to the lowest position, the support rod will close to the ground, you can safely step on the foot pedal and leave the chair.

Trouble and Solution

NO.	Trouble	Potential Issues	Solution
1	The pump is not working.	The pump's lift function is not working properly.	Please refer to section 4 of the operation guide to check if the operation is correct.
2		Cannot swivel.	Please refer to section 2 of the operation guide to check if the operation is correct. If the chair still has difficulty rotating, please repeat lifting the foot pedal and then pressing it down while rotating the chair several times. This should make the chair easier to rotate.
3	The pump is making unusual noises.	There is air inside the pump.	Because it's brand new, there may be some air inside the pump. Please repeatedly lift and lower the chair to expel the air.

Trouble and Solution

NO.	Trouble	Potential Issues	Solution
4	The chair is wobbling.	Loose connection between the pump and the base.	Please check the screws underneath the base and tighten them again.
5	Missing screws.	Some screws are pre-installed.	Most screws are pre-installed on the chair's components. Please check again to see if there are screws in the screw holes on the chair's components.
6	Missing parts.	The chair is shipped in two packages.	If your chair is shipped in two separate packages, we will send you the tracking numbers for both packages via Amazon after the chair has been shipped. Please keep an eye out for them. The two packages may not arrive simultaneously.
7	Damaged	The chair leather, metal, and other accessories are damaged.	If you find any damage to the chair after receiving it, please do not rush to return it. Please contact us and provide pictures of the damage in your message so that we can quickly identify the required parts. We will promptly send you the replacement parts.
8	Other issues	Contact Us	If you have any further questions, please feel free to contact us at **service@baashabeauty.com**. In order for us to better understand and resolve the issue quickly, please provide relevant pictures or videos related to the problem in your email.

WARNING:

ANY PACKING BAGS OF THIS PRODUCT ARE NOT TOYS. TO AVOID THE DANGER OF SUFFOCATION, KEEP AWAY FROM BABIES AND CHILDREN. DO NOT USE IN CRIBS OR BEDS.